
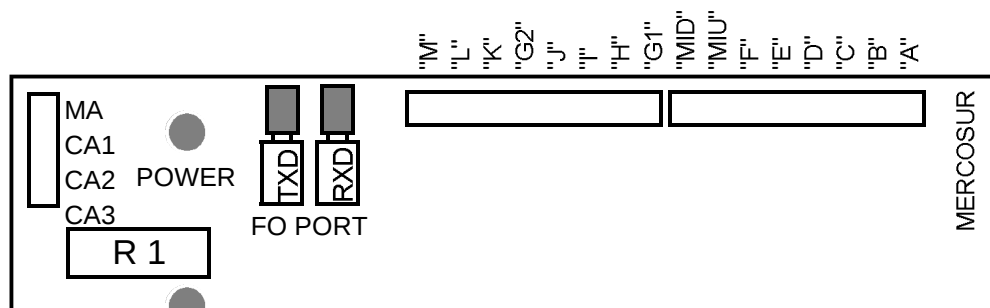


Segment designation for 7
segment indicators.
Common anode displays.

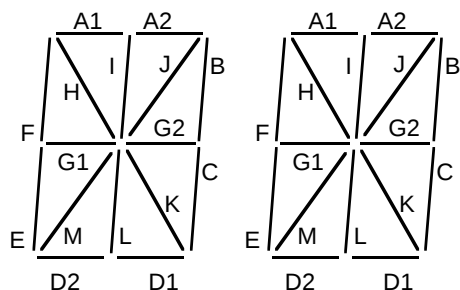

Segment designation for 14 (16) segment
indicators.
Common anode displays.
Drive A1 and A2 segments with "A" output.
Drive D1 and D2 segments with "D" output.

14 (16) segment common anode indicators drive is multiplexed. Corresponding segments in each digit are wired in parallel (this wiring is usually internal for commercial dual indicators).

The circuit in the diagram may drive 400mA anode currents. For higher currents use darlington PNP transistor.

CONTROLES S. A.

Electrónica Industrial y Telecomunicaciones

AVENIDA RIVERA 3314 TEL +598(2) 622 0651
MONTEVIDEO 11300 FAX +598(2) 622 2048
URUGUAY www.controles.com
E-mail info@controles.com

CEA51FA CONTROLLER USER'S MANUAL

Version 5.0
99/06/08

Fig. 11

14 (16) segments digital indicator